



DMP 331 P

Pressure Transmitter with Flush Pressure Port

- ▶ foodstuff industry, pharmaceutical and chemical industries, etc.
- ▶ medium temperature up to 300 °C
- ▶ accuracy:
0.175% / 0.125% FSO BFSL
(0.35 % / 0.25% FSO IEC 60770)
- ▶ nominal pressure ranges from
0 ... 100 mbar up to 0 ... 40 bar

The DMP 331 P is a pressure transmitter for process measurement. Usage is possible with all media that are compatible with stainless steel 1.4435 (316L) and sealing material.

A piezoresistive stainless steel sensor, which features small thermal effect and excellent linearity, generate the base of the DMP 331 P. So it is possible to meet accuracy demands up to 0.25 % FSO (IEC 60770). Besides silicon oil and food compatible oil also Halocarbon or other filling oils can be delivered on request.

For usage with higher media temperature a cooling element can be added optionally. Thus media temperatures up to 300 C can be achieved. The flush pressure ports are made with inch, clamp, or dairy pipe connection. Further pressure ports or chemical seals are available on request. Additionally the DMP 331 P is suited for explosive area (zone 0).

Preferred areas of use are:

- ▶ process engineering
- ▶ chemical industry
- ▶ foodstuff industry
- ▶ paper industry

- ▶ small thermal effect
- ▶ good linearity
- ▶ good long term stability
- ▶ option Ex version:
(only with 4 ... 20 mA / 2-wire)
TÜV 03 ATEX 2006 X
- ▶ customer specific versions:
 - special pressure ranges
 - variety of electrical and mechanical connections
 - other versions on request

Characteristics



DMP 331 P
Process Pressure Transmitter

DMP 331 P

Process Pressure Transmitter

Technical Data

Input pressure range

Nominal pressure gauge [bar]	-1...0 ¹	0.10	0.16	0.25	0.4	0.6	1.0	1.6	2.5	4.0	6.0	10	16	25	40
Nominal pressure abs. ¹ [bar]	-	-	-	-	-	0.6	1.0	1.6	2.5	4.0	6.0	10	16	25	40
Permissible overpressure [bar]	3	1	1	1	1	3	3	6	6	20	20	60	60	60	100

Output signal / Supply

Standard	2-wire:	4 ... 20 mA / $V_s = 12 \dots 36 V_{DC}$	Ex-protection:	$V_s = 14 \dots 28 V_{DC}$
Optional	3-wire:	0 ... 20 mA / $V_s = 14 \dots 36 V_{DC}$ 0 ... 10 V / $V_s = 14 \dots 36 V_{DC}$		

Performance

Accuracy	standard:	nominal pressure > 0.4 bar:	IEC 60770 ²	BFSL
		nominal pressure ≤ 0.4 bar:	≤ ± 0.35 % FSO	≤ ± 0.175 % FSO
		option: nominal pressure > 0.4 bar:	≤ ± 0.50 % FSO	≤ ± 0.250 % FSO
Permissible load	current 2-wire:	$R_{max} = [(V_s - V_{smin}) / 0.02] \Omega$		
	current 3-wire:	$R_{max} = 500 \Omega$		
	voltage 3-wire:	$R_{min} = 10 k\Omega$		
Influence effects	supply:	0.05 % FSO / 10 V		
	load:	0.05 % FSO / kΩ		
Response time	< 10 msec			

Thermal effects (Offset and Span)³

Nominal pressure P_N [bar]	-1 ... 0	≤ 0.1	≤ 0.25	≤ 0.4	≤ 1.0	> 1.0
Tolerance band [% FSO]	≤ ± 0.75	≤ ± 2.0	≤ ± 1.5	≤ ± 1.0	≤ ± 1.0	≤ ± 0.75
TC, average [% FSO / 10 K]	± 0.12	± 0.4	± 0.3	± 0.2	± 0.15	± 0.12
in compensated range [°C]	0 ... 70		0 ... 50			0 ... 70

Electrical protection

Short-circuit protection	permanent
Reverse polarity protection	no damage, but also no function
Electromagnetic compatibility	emission and immunity according to EN 61326
Option Ex-protection only with 4 ... 20 mA / 2-wire DX13-DMP 331 P	zone 0 ⁴ : II 1 G Ex ia IIC T4 zone 20: II 1 D Ex tD A20 IP65 T 85°C safety technical maximum values: $V_i = 28 V$, $I_i = 93 mA$, $P_i = 660 mW$, $C_i \leq 1 nF$, $L_i \leq 10 \mu H$

Mechanical stability

Vibration	10 g RMS (20 ... 2000 Hz)
Shock	100 g / 11 ms

Permissible temperatures

Medium	-25 ... 125 °C ^{1,5,6}		
Electronics / environment	-25 ... 85 °C	Ex-protection:	application in zone 0: -20 ... 60 °C application in zone 1 or higher: -25 ... 70 °C
Storage	-40 ... 100 °C		

¹ for vacuum and nominal pressure abs. the max. medium temperature is 70 °C

² accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)

³ an optional cooling element can influence thermal effects for offset and span depending on installation position and filling conditions


⁴ approved for atmospheric pressure from 0.8 bar up to 1.1 bar

⁵ with optional cooling element its maximum permissible temperature is valid


⁶ max. temperature of the medium for nominal pressure gauge > 0 bar: 150 °C for 30 minutes with a max. environmental temperature of 50 °C

Mechanical connection (dimensions in mm)

Inch Thread (DIN 3852)

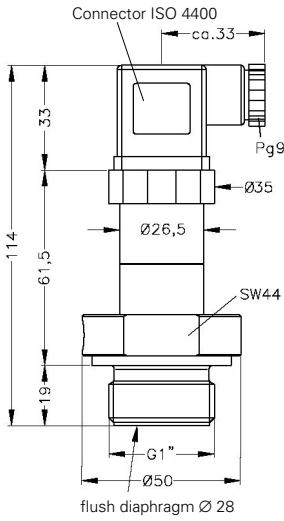


G1" flush

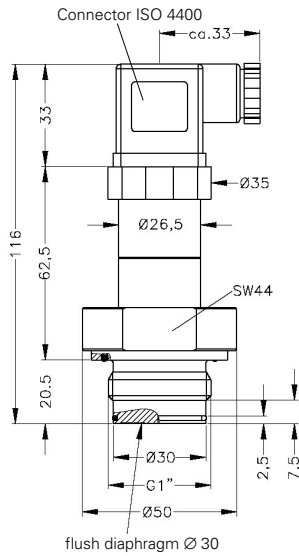


G1" flush
with radial o-ring


Clamp (ISO 2852)

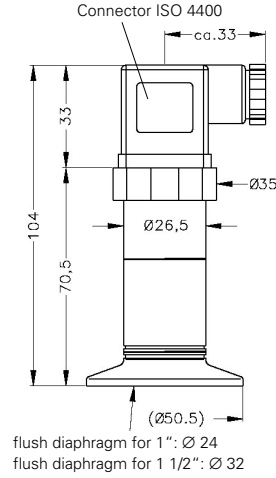


DN1" or DN 1 1/2"

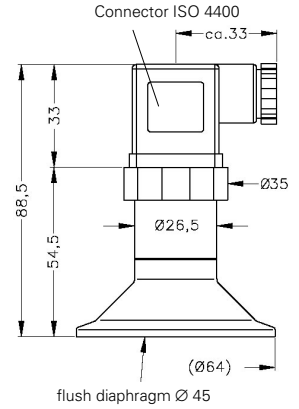

DN2"

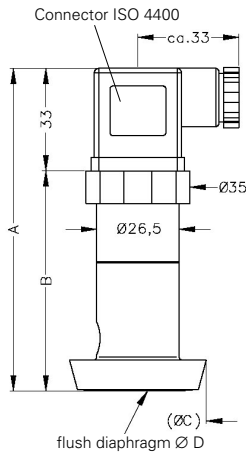


Dimensions in mm			
Size	DN 25	DN 40	DN 50
A	104	86	86
B	71	53	53
C	44	56	68.5
D	24	32	45

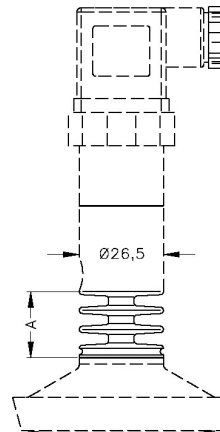

temperature range	150° C	300° C
size A	22	34
number of cooling fins	2	3


⇒ Ex-protection and SIL-version: total length increases by 20 mm!

Standard




ISO 4400
(IP 65)


Optional




Binder Series 723
(IP 67)




M12x1 4-pin
(IP 67)



Cable gland⁷
(IP 67)



Buccaneer⁸
(IP 68)



Field housing
(IP 67)

⁷ different cable types and lengths available; standard: 2 m PVC cable (without ventilation tube), optionally cable with ventilation tube

⁸ for gauge pressure cable with ventilation tube required

DMP 331 P

Process Pressure Transmitter

Technical Data

Filling Fluids

Standard	silicon oil
Optional	food compatible oil (with FDA-approval) / Halocarbon and others on request

Materials

Pressure port	stainless steel 1.4435 (316L) / Monel on request
Housing	stainless steel 1.4301 (304) / field housing 1.4305 (303) with cable gland of brass, nickel plated
Seals (media wetted)	inch thread: standard: FKM (recommended for medium temperatures ≤ 200 °C) optionally: FFKM (recommended for medium temperatures > 200 °C) others on request clamp and dairy pipe: without
Diaphragm	stainless steel 1.4435 (316L) / Tantalum and Hastelloy® C-276 (2.4819) on request
Media wetted parts	pressure port, seals, diaphragm

Miscellaneous


Optionally SIL 2 application	according to IEC 61508 / IEC 61511
Connecting cables (by factory)	cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1.0 μ H/m
Current consumption	signal output current: max. 25 mA signal output voltage: max. 7 mA
Weight	min. 200 g (depending on process connection)
Installation position	any ⁹
Operational life	$> 100 \times 10^6$ cycles

Pin configuration


Electrical connection		ISO 4400	Binder 723 (5-pin)	M12x1 (4-pin)	Buccaneer (4-pin)	Field housing	cable colours (DIN 47100)
2-wire-system	Supply +	1	3	1	1	IN +	white
	Supply -	2	4	2	2	IN -	brown
	Ground	ground pin	5	4	4	\perp	yellow / green (shield)
3-wire-system	Supply +	1	3	1	1	IN +	white
	Supply -	2	4	2	2	IN -	brown
	Signal +	3	1	3	3	OUT +	green
	Ground	ground pin	5	4	4	\perp	yellow / green (shield)

Wiring diagrams

2-wire-system (current)



3-wire-system (current / voltage)

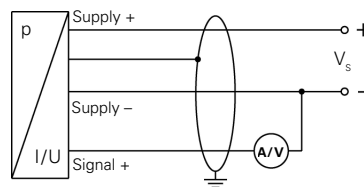

⁹ Pressure transmitters are calibrated in a vertical position with the pressure connection down. If this position is changed on installation there can be slight deviations in the zero point for pressure ranges $P_N \leq 1$ bar.

Hastelloy® is a brand name of Haynes International Inc.

This data sheet contains product specification, properties are not guaranteed. Subject to change without notice.

