



INCR

FLOAT LEVEL SWITCH

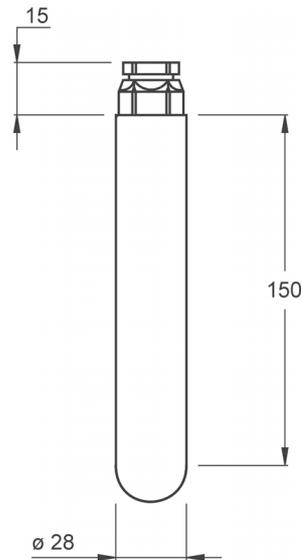


Function	Control of maximum or minimum level when filling or emptying.
Application	Reduced dimension. Reed contact
Process connection	When the float goes up or down by the action of the liquid, the contact opens or closes the electrical circuit.
Características del contacto	1,5A / 230VAC
Densidad del producto	0,9 Kg/dm ³
Operating temperature	+60 °C
Pressure	1 bar
Protection	IP 68
Float material	Polietilene, orange
Cable gland material	Polietilene, green
Cable	PVC (3 x 0,75 mm ²)
Reference / Cable length	INCR-02 : 2m INCR-05 : 5m INCR-10 : 10m
Dimensions	Ø 28 x 150 mm

Installation examples

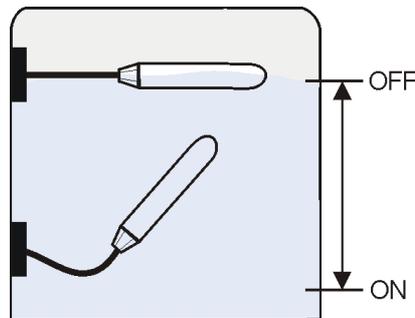

FILLING

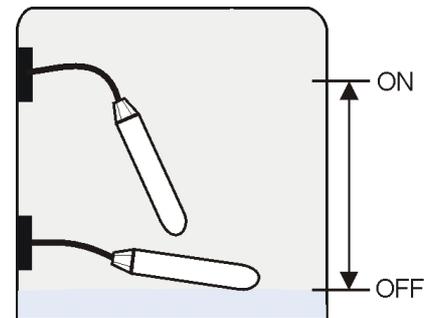

EMPTYING