

# LMP 307T

## Level and Temperature Transmitter

Stainless Steel Sensor

accuracy according to IEC 60770:  
standard: 0.35 % FSO  
option: 0.25 % FSO



### Nominal pressure / nominal temperature

from 0 ... 1 mH<sub>2</sub>O up to 0 ... 250 mH<sub>2</sub>O

from 0 ... 30 °C up to 0 ... 70 °C

others on request

### Output signals

2-wire: 4 ... 20 mA (pressure)

2-wire: 4 ... 20 mA (temperature)

### Special characteristics

- ▶ diameter 26,5 mm
- ▶ separate output signals for pressure and temperature ranges
- ▶ easy handling
- ▶ low maintenance and wiring costs

### Optional versions

- ▶ different kinds of cables
- ▶ different kinds of seal materials
- ▶ customer specific versions

BD|SENSORS has developed the stainless steel submersible probe LMP 307T for continuous level and temperature measurement in water and in clean to lightly-soiled liquids.

The advantage: simultaneous recording of level and temperature with separate independent signal amplification. The maintenance and wiring costs are considerably reduced.

In addition to classical signal processing of the level, an additional signal circuit independent of the level which converts the temperature signal into a 4 ... 20 mA analogue signal in 2-wire technology is provided.

Typical application areas are, for example, drinking water purification, monitoring of rainwater overflow basins and river courses, in addition to level measurement in containers or tank batteries.

### Preferred areas of use are



Water / filtrated sewage  
e.g. drinking water system

water recycling



Fuel / Oil  
e.g. tank farm




Input pressure range														
Nominal pressure gauge	[bar]	0.1	0.16	0.25	0.4	0.6	1	1.6	2.5	4	6	10	16	25
Level	[mH <sub>2</sub> O]	1	1.6	2.5	4	6	10	16	25	40	60	100	160	250
Overpressure	[bar]	0.5	1	1	2	5	5	10	10	20	40	40	80	80
Burst pressure $\geq$	[bar]	1.5	1.5	1.5	3	7.5	7.5	15	15	25	50	50	120	120

Input temperature range					
Temperature measuring range standard		0 ... 30 °C	0 ... 50 °C	0 ... 70 °C	others on request <sup>1</sup>
<sup>1</sup> min. temperature range: 30°C; max. temperature range: 80°C min. temperature: -10°C; max. temperature: 70 °C					
Output signal / Supply					
2-wire (pressure) <sup>2</sup>		4 ... 20 mA / V <sub>S</sub> = 10 ... 30 V <sub>DC</sub>			
2-wire (temperature) <sup>2</sup>		4 ... 20 mA / V <sub>S</sub> = 10 ... 30 V <sub>DC</sub>			
<sup>2</sup> the circuits are galvanically isolated from each other					
Performance					
Accuracy (pressure) <sup>3</sup>	standard:	nominal pressure < 0.4 bar:	$\leq \pm 0.5\%$ FSO		
		nominal pressure $\geq 0.4$ bar:	$\leq \pm 0.35\%$ FSO		
	option 1:	nominal pressure $\geq 0.4$ bar:	$\leq \pm 0.25\%$ FSO		
Accuracy (temperature) <sup>4</sup>	$\leq \pm 1$ °C				
Permissible load	$R_{\max} = [(V_S - V_S \text{ min}) / 0.02 \text{ A}] \Omega$				
Influence effects	supply:	0.05 % FSO / 10 V			
	load:	0.05 % FSO / k $\Omega$			
Long term stability	$\leq \pm 0.1\%$ FSO / year at reference conditions				
Response time	< 10 ms (for output signal 2-wire (pressure))				
<sup>3</sup> accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability)					
<sup>4</sup> Pt 100 class B; compensation time up to 1h depending on constant temperature and environmental respectively mass conditions					
Thermal effects (Offset and Span)					
Nominal pressure P <sub>N</sub>	[bar]	< 0.40		$\geq 0.40$	
Tolerance band	[% FSO]	$\leq \pm 1$		$\leq \pm 0.75$	
in compensated range	[°C]	0 ... 70			
Permissible temperatures					
Permissible temperatures	medium:	-10 ... 70 °C			
	storage:	-25 ... 70 °C			
Electrical protection <sup>5</sup>					
Short-circuit protection	permanent				
Reverse polarity protection	no damage, but also no function				
Electromagnetic compatibility	emission and immunity according to EN 61326				
<sup>5</sup> additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request					
Electrical connection					
Cable with sheath material <sup>6</sup>	PVC	(-5 ... 70 °C)	grey		
	PUR	(-10 ... 70 °C)	black		
	FEP <sup>7</sup>	(-10 ... 70 °C)	black		
	others on request				
<sup>6</sup> cable with integrated air tube for atmospheric pressure reference					
<sup>7</sup> do not use freely suspended probes with an FEP cable if effects due to highly charging processes are expected					
Materials (media wetted)					
Housing	stainless steel 1.4404 (316L)				
Seals	FKM others on request				
Diaphragm	stainless steel 1.4435 (316L)				
Protection cap	POM				
Cable sheath	PVC, PUR, FEP				
Miscellaneous					
Connecting cables (by factory)	cable capacitance:	signal line/shield also signal line/signal line: 160 pF/m			
	cable inductance:	signal line/shield also signal line/signal line: 1 $\mu$ H/m			
Current consumption	signal output current:	max. 25 mA / signal output voltage: max. 7 mA			
Weight	approx. 200 g (without cable)				
Ingress protection	IP 68				
CE-conformity	EMC Directive: 2004/108/EC				

**Wiring diagram**


2x2-wire-system (current)

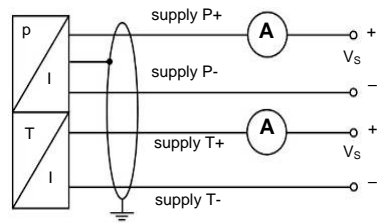


**Pin configuration**



Electrical connection	cable colours (IEC 60575)
Supply P+	wh (white)
Supply P-	bn (brown)
Supply T+	gy (gray)
Supply T-	pk (pink)
Shield	gnye (green-yellow)

**Dimensions (in mm)**

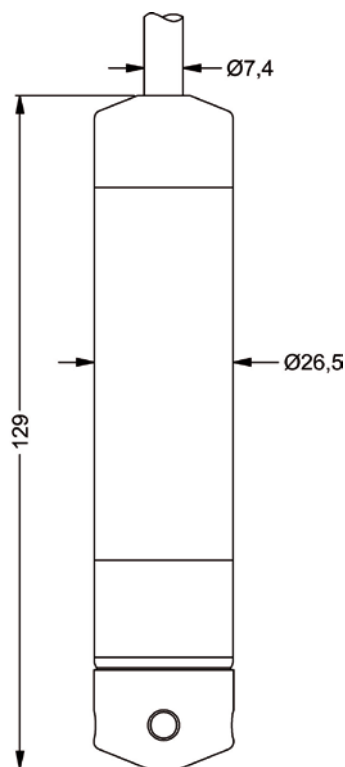

Mounting flange with cable gland		
<b>Technical data</b>		
Suitable for	all probes	
Flange material	stainless steel 1.4404 (316L)	
Material of cable gland	standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic	
Seal insert	material: TPE (ingress protection IP 68)	
Hole pattern	according to DIN 2507	
<b>Version</b>	<b>Size (in mm)</b>	<b>Weight</b>
DN25 / PN40	D = 115, k = 85, b = 18, n = 4, d = 14	1.4 kg
DN50 / PN40	D = 165, k = 125, b = 20, n = 4, d = 18	3.2 kg
DN80 / PN16	D = 200, k = 160, b = 20, n = 8, d = 18	4.8 kg
<b>Ordering type</b>		<b>Ordering code</b>
DN25 / PN40 with cable gland brass, nickel plated		ZMF2540
DN50 / PN40 with cable gland brass, nickel plated		ZMF5040
DN80 / PN16 with cable gland brass, nickel plated		ZMF8016
<b>Terminal clamp</b>		
<b>Technical data</b>		
Suitable for	all probes with cable $\varnothing$ 5.5 ... 10.5 mm	
Material	standard: steel, zinc plated optionally: stainless steel 1.4301 (304)	
Weight	approx. 160 g	
<b>Ordering type</b>		<b>Ordering code</b>
Terminal clamp, steel, zinc plated		Z100528
Terminal clamp, stainless steel 1.4301 (304)		Z100527
<b>Display program</b>		
<p><b>CIT 200</b> Process display with LED display</p> <p><b>CIT 250</b> Process display with LED display and contacts</p> <p><b>CIT 300</b> Process display with LED display, contacts and analogue output</p> <p><b>CIT 350</b> Process display with LED display, bargraph, contacts and analogue output</p> <p><b>CIT 400</b> Process display with LED display, contacts, analogue output and Ex-approval</p> <p><b>CIT 600</b> Multichannel process display with graphics-capable LC display</p> <p><b>CIT 650</b> Multichannel process display with graphics-capable LC display and datalogger</p> <p><b>CIT 700</b> Multichannel process display with graphics-capable TFT monitor, touchscreen and contacts</p> <p><b>PA 440</b> Field display with 4-digit LC display</p> <p>For further information please contact our sales department or visit our homepage: <a href="http://www.bdsensors.com">http://www.bdsensors.com</a></p>		

cable gland M16x1.5 with seal insert (for cable- $\varnothing$  4 ... 11 mm)



© 2014 BD|SENSORS GmbH – The specifications given in this document represent the state of engineering at the time of publishing. We reserve the right to make modifications to the specifications and materials.

Ordering code LMP 307T

LMP 307T

□□□ - □□□□ - □□□□□□ - □ - □ - □ - □ - □ - □□□□ - □□□

Pressure		in bar	4	5	5																
		in mH <sub>2</sub> O	4	5	6																
Input	[mH <sub>2</sub> O]	[bar]																			
	1.0	0.10	1	0	0	0															
	1.6	0.16	1	6	0	0															
	2.5	0.25	2	5	0	0															
	4.0	0.40	4	0	0	0															
	6.0	0.60	6	0	0	0															
	10	1.0	1	0	0	1															
	16	1.6	1	6	0	1															
	25	2.5	2	5	0	1															
	40	4.0	4	0	0	1															
	60	6.0	6	0	0	1															
	100	10	1	0	0	2															
160	16	1	6	0	2																
250	25	2	5	0	2																
	customer		9	9	9															consult	
Input temperature		°C																			
	0 ... 30		0	0	0	x	3	0													
	0 ... 50		0	0	0	x	5	0													
	0 ... 70		0	0	0	x	7	0													
	customer		9	9	9	9	9	9													
Housing																					
	Stainless steel 1.4404 (316L)		1																		
	customer		9																		
Diaphragm																					
	Stainless steel 1.4435 (316L)		1																		
	customer		9																		
Output pressure																					
	4 ... 20 mA / 2-wire																				1
Output temperature																					
	4 ... 20 mA / 2-wire																				1
Seals																					
	FKM																				1
	customer																				9
Accuracy																					
	standard for P <sub>N</sub> ≥ 0.4 bar	0.35 %																			3
	standard for P <sub>N</sub> < 0.4 bar	0.5 %																			5
	option 1 for P <sub>N</sub> ≥ 0.4 bar	0.25 %																			2
	customer																				9
Electrical connection																					
	PVC-cable <sup>1</sup>																				1
	PUR-cable <sup>1</sup>																				2
	FEP-cable <sup>1</sup>																				3
	customer																				9
Cable length																					
	in m																				
	standard: 3 m	PVC																			0
	standard: 5 m	PVC																			0
	standard: 10 m	PVC																			1
	standard: 15 m	PVC																			1
	standard: 20 m	PVC																			2
	<b>special length</b>	<b>PVC</b>																			<b>9</b>
	standard: 3 m	PUR																			0
	standard: 5 m	PUR																			0
	standard: 10 m	PUR																			1
	standard: 15 m	PUR																			1
	standard: 20 m	PUR																			2
	<b>special length</b>	<b>PUR</b>																			<b>9</b>
	standard: 5 m	FEP																			0
	standard: 10 m	FEP																			0
	<b>special length</b>	<b>FEP</b>																			<b>9</b>
Special version																					
	standard																				0
	customer																				9

<sup>1</sup> cable with integrated air tube for atmospheric pressure reference

Standard lengths 3 / 5 / 10 / 15 / 20 m are available from stock, special lengths are manufactured order-related, price per meter (see above).

This document contains product specifications; properties are not guaranteed. Detailed information about options are defined in the datasheet. Subject to change without notice.