



VLW602 Display and configuration unit

Suitable for PTU ultrasonic level transmitters

Keyboard with LCD display

IP66

Power supply of 24Vdc transmitters

Suitable for applications where the level transmitter is installed in uncomfortable location. VLW602 is a good solution for the matched compact level transmitters remote viewing and configuration:

VLW602 module allows you to power and configure all the compatible transmitters without the use of other devices. VLW602 can be installed outdoors near the transmitter installation area, this is made possible by the VLW601 small size and the IP66 mechanical protection. The VLW602 unit ensures the galvanic separation between the power line and the 4÷20mA signal, in the AC power supply case (85÷265Vac)

Technical Feature

Housing material

Aluminium

Mechanical installation

wall mounting

Protection degree

IP66

Keyboard

4 buttons

Display

LCD display

Electrical connection

terminals

Working temperature

-25 ÷ +70°C

VLW602 power supply

85÷265Vac; 10÷30Vdc

Transmitters power supply


24Vdc

Consumption

2W

Communication with sensor

Modbus

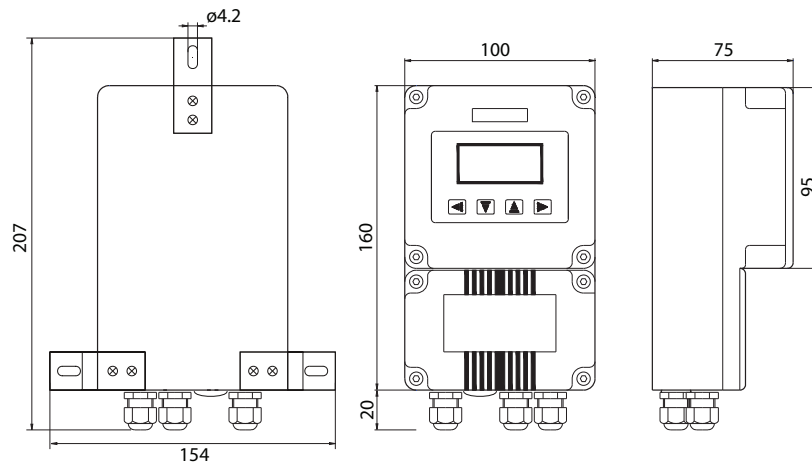

VLW602 Display and configuration unit
 IP66 protection
 For connection to PTU50/51/56 transmitters
 Communication with MODBUS sensor

Version	
A	Standard
D	With male connector in SS316 for PTU cable + 5m cable for probe connection - Only with 24Vdc supply
Z	Special
Power supply	
2	85+265Vac - 50+60Hz
4	24Vdc (necessary for version D)
Accessories	
A	None
Z	Special